

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**


**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : B32B 27/12, C08J 5/24, B29C 70/06</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 00/27632</b></p> <p>(43) International Publication Date: 18 May 2000 (18.05.00)</p>
<p>(21) International Application Number: PCT/GB99/03667</p> <p>(22) International Filing Date: 5 November 1999 (05.11.99)</p> <p>(30) Priority Data:  9824320.7                      6 November 1998 (06.11.98)                      GB  9907489.0                      31 March 1999 (31.03.99)                      GB</p> <p>(71) Applicant (for all designated States except US): STRUC- TURAL POLYMER SYSTEMS LIMITED [GB/GB]; St. Cross Business Park, Newport, Isle of Wight PO30 5WU (GB).</p> <p>(72) Inventors; and  (75) Inventors/Applicants (for US only): NESS, Derek [GB/GB]; St. Cross Business Park, Newport, Isle of Wight PO30 5WU (GB). CRONK, Peter [GB/GB]; 87 Craven Avenue, St. Judes, Plymouth PL4 8SW (GB).</p> <p>(74) Agent: SMAGGASGALE, Gillian, Helen; Olswang, 90 Long Acre, London WC2E 9TT (GB).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b>  <i>With international search report.</i></p>

(54) Title: MOULDING MATERIALS

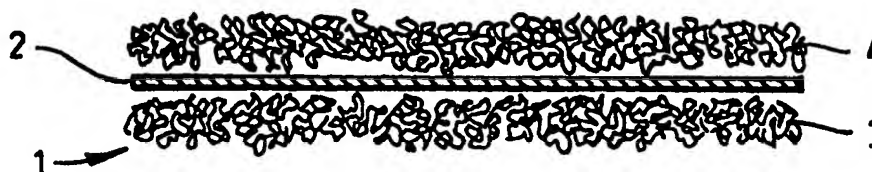

## (57) Abstract.

A multi-layered moulding material (1) is described which comprises a layer (2) of resin material and conjoined to at least one surface thereof a fibrous layer (3, 4). A method of forming the multi-layered material (1) is also described.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## MOULDING MATERIALS

The present invention relates to moulding materials. More particularly, it relates to  
5 composite moulding materials which include fibres in their structure which in the  
moulded product will provide reinforcement.

Historically, mouldings were formed from resin either alone or reinforced with fibres.  
However, whilst in principle the products were satisfactory, where fibres were  
10 present, it was difficult to control the ratio of the resin to the reinforcement fibres and  
thus the quality of the products produced was not consistent. The process was  
therefore refined such that the supplier of the resin provided the producer of the  
moulded article with a pre-impregnated reinforcement known as a "prepreg". The  
moulder is then able to produce the moulded article from the pre-impregnated  
15 material confident that the ratio of resin to fibre is correct. Thus, the present  
invention is particularly directed to preformed preregs.

It will be understood that conventionally "preregs" are fibrous composite materials  
which comprise fibres embedded in a matrix of resin and which are provided in the  
20 form of, for example, sheets, strips, or continuous rolls, which can then be placed in  
contact with a mould prior to the resin being cured to form the moulded product. A  
prepreg may comprise unidirectional fibres or the fibres may be multi-directional. In  
use, several layers of prepreg may be layered prior to curing to form a laminate  
product.

25 The most basic form of prepreg is prepreg tape or strip. These tapes or strips  
comprise unidirectional non-woven fibres held together by resin. These tapes are  
attractive as the straight fibres provide the finished moulding with good mechanical  
properties. Further the good packing of the fibres reduces the amount of resin  
30 required in the laminate. However, as these tapes have little porosity through their  
thickness, when multiple layers are used together the tapes or strips trap substantial  
volumes of air which will lead to voids in the cured laminate.

For the purposes of this application the term prepreg will be used to refer not only to composite materials where the fibres are embedded in the resin but also to those where they are in contact with it.

5    However formed, when such prepregs are layered to produce a thick laminated product, certain drawbacks and disadvantages can arise. A thick laminated product is generally understood to have a thickness greater than 2mm and is preferably greater than 4mm and may extend to 40mm.

10   A particular disadvantage of such thick products is that air can become trapped either within a layer of the moulding material or between adjacent layers. The presence of intra-, inter- or intra- and inter-laminar air can lead to voids being formed in the finished cured product. Such voids can result in the laminate having reduced mechanical properties and can lead to premature failure of the composite material.

15

Many techniques have been suggested to reduce the occurrence of such voids. One such technique is that of frequent vacuum debulking in which a few layers are laid in the mould and consolidated using vacuum before further layers of moulding material are laid onto the laminate formed in the first step. However, whilst this technique  
20   may go some way to addressing the problem of void formation, a void content of 2 to 5% will still commonly be present. Further, the technique of vacuum debulking, whilst being somewhat effective, is labour intensive and is therefore costly and hence not desirable.

25   The problem of void formation is particularly exacerbated when heavyweight material, for example 1200 g/m<sup>2</sup> glass fibre unidirectional tape, is used in the production of the moulding. It will be understood that it is desirable to use heavyweight materials in moulding production since their use makes it possible to produce the finished product from fewer layers thereby reducing the costs both of  
30   labour and materials. However, where heavyweight material of this kind is used, void formation is particularly prevalent since such materials are generally impervious to air movement through their thickness.

It has been suggested that interleaving dry reinforcement layers between the layers of the prepreg as the laminate is built up can reduce the problem of void formation. However, whilst this technique does go some way towards addressing the problem of void formation, the presence of the dry reinforcement layer reduces the relative resin content of the finished product which may have a detrimental effect on the strength of the finished product. Whilst it is possible to compensate for the loss of resin from the prepreg to the dry reinforcement layers by providing additional resin in the prepreg, such increased resin content materials are difficult to handle because of their high tack and low drape. It is also important that there is complete coincidence of the resin rich prepreg and dry layers throughout the laminate or resin rich or resin lean areas will result.

We have now found that the aforementioned problems can be solved by the provision of a multi-layered moulding material comprising a layer of a resin material layer and conjoined to at least one surface thereof a fibrous layer.

Thus, according to a first aspect of the present invention, there is provided a multi-layered moulding material comprising a layer of resin material and conjoined to at least one surface thereof a fibrous layer

The fibrous layer may be attached to the resin layer by any suitable means. The fibrous layer may be held in place by the inherent tack of the surface of the resin layer or, in one alternative arrangement, the fibrous layer may be partially impregnated by the resin of the resin layer.

The moulding material of the present invention may itself be a prepreg.

In a particularly preferred embodiment, the multi-layered moulding material comprises three layers wherein a central resin layer has a fibrous layer conjoined to either side.

In one alternative arrangement, the multi-layered moulding material comprises five layers in which the two outer layers are dry fibrous layers each attached on its inner

surface to a resin film layer. The resin film layers are themselves adhered to a further dry fibrous layer which forms the central (fifth) layer. The resin layers in this multi-layered material may be formed from different resins.

- 5 Larger multi-layered structures may also be formed in which dry fibrous layers are attached to a resin film layer. Again, the resin film layers in this multi-layered material may be formed from different resins.

One or more of the layers of the multi-layered moulding material may be a  
10 conventional prepreg.

Thus, in one particularly preferred embodiment, the outer surface of the moulding material is free from resin and is therefore dry to the touch due to the presence of the two fibrous layers and can therefore be handled readily.

- 15 In one alternative arrangement, the multi-layered moulding material may have a tackifier or a binder material applied to at least one surface.

Without wishing to be bound by any theory, it is believed that when the material of  
20 the present invention is used alone, laminated with further layers of moulding material of the present invention or laminated with layers of conventional prepreg, the fibrous layer of the material of the present invention performs in a similar manner to the dry layers of reinforcement of the conventional systems, in that it allows entrapped air to pass out of the laminate.

25 The void content for a product produced from, or including, the moulding material of the present invention will generally be less than 2% and is commonly less than 0.5%.

One particular benefit of the arrangement of the present invention is that the amount  
30 of resin present in the multi-layered moulding material can be controlled such that when the material is cured, the correct amount of resin will flow into the dry fibrous layers and there will be no reduction in the cured resin content.



The moulding material of the present invention surprisingly offers a number of advantages over the conventional moulding materials. One particular benefit of the present invention is that the moulding material exhibits improved handling characteristics when compared to those of conventional materials in that it is more flexible, that is to say it has improved drape and can therefore be used in the production of more complex mouldings. It has been found that the moulding material of the present invention having a fibre weight of  $3,500 \text{ g/m}^2$  has better drape than a comparable conventional prepreg having a fibre weight of  $1,700 \text{ g/m}^2$ .

Further, it has been found that the moulding material of the present invention exhibits significantly lower tendency to bridge across details in a moulding. Without wishing to be bound by any theory, we believe that this is due to the abilities of the plies to slide over each other during the consolidation and curing stages. Further, even if bridging does occur, the moulding material of the present invention tends to fill any bridged areas with resin rather than leave a void in the laminate. Again, without wishing to be bound by any theory, we believe that this is due to the fact that the potential void has been evacuated by the excellent air transport properties of the material of the invention and thus resin can fill the potential void as no air is trapped. By this means a high quality finished product may be obtained. This is in contrast to conventional materials, where imperfections may be noted in the surface of the moulding at complex mould areas, such as corners due to bridging of mould areas by the moulding material. It is therefore possible to use the moulding material of the present invention in the production of more complex shapes than has been achievable heretofore.

In conventional prepregs that are processed under vacuum consolidation, it is important that dry areas of reinforcement fibres are avoided since they generally do not completely wet out during the production of the prepreg which may lead to areas of weakness in the finished product. However, where the moulding materials of the present invention are used, the fibrous layer is specifically not wet out during production of the prepreg but will be completely wet out during the processing.

As the improved moulding material of the present invention exhibits these improved characteristics, it is possible to use heavier weight preregs than has been possible using conventional prepreg technology. With conventional technology, even when heavy weights are produced, they are difficult to handle and therefore are not desirable. However, since the moulding materials of the present invention exhibit improved drape characteristics, even heavier weight preregs may be handled readily.

Any suitable thermoset resin may be used in the production of the moulding material of the present invention. Particularly suitable resin systems include the epoxy, polyester, vinylester, polyimide, cyanate ester, phenolic and bismaleimide systems. Suitable epoxy resins include diglycidyl ethers of bisphenol A, diglycidyl ethers of bisphenol F, epoxy novolac resins and N-glycidyl ethers, glycidyl esters, aliphatic and cycloaliphatic glycidyl ethers, glycidyl ethers of aminophenols, glycidyl ethers of any substituted phenols, monomers containing methacrylate groups (such as glycidyl methacrylates, epoxy acrylates and hydroxyacrylates) and blends thereof. Also included are modified blends of the aforementioned thermosetting polymers. These polymers are typically modified by rubber or thermoplastic addition.

Any suitable catalyst may be used. The catalyst will be selected to correspond to the resin used. One suitable catalyst for use with an epoxy resin is a dicyandiamide curing agent. The catalyst may be accelerated. Where a dicyandiamide catalyst is used, a substituted urea may be used as an accelerator. Suitable accelerators include Diuron, Monuron, Fenuron, Chlortoluron, bis-urea of toluenediisocyanate and other substituted homologues. The epoxy curing agent may be selected from Dapsone (DDS), Diamino-diphenyl methane (DDM), BF<sub>3</sub>-amine complex, substituted imidazoles, accelerated anhydrides, metaphenylene diamine, diaminodiphenylether, aromatic polyetheramines, aliphatic amine adducts, aliphatic amine salts, aromatic amine adducts and aromatic amine salts. Also suitable for systems containing acrylate functionality are UV photoinitiators such as those which liberate a Lewis or Bronstead acid upon irradiation. Examples include triarylsulphonium salts which possess anions such as tetrafluoroborate or hexafluoroborate.

The resin system may also include additives relevant to the production of the moulding such as hardeners. Other additives may be included to effect the finished moulding such as pigments, UV stabilising additives, anti-mould, anti-fungal and flame retardant additives. Whatever additives are added, it is important to ensure that the viscosity of the resin is sufficiently low during the curing and consolidation steps. If it is not, it will not wet out the dry layers.

The fibre layer or layers may be formed from any suitable fibres. Suitable fibres include glass fibres, carbon fibres and polymeric fibres such as polyethylene fibres and aramid fibres. Suitable glass fibres include those made from E-glass, S-glass, C-glass, T-glass or R-glass. Suitable aramid fibres include those sold under the trade marks KEVLAR and TWARON HM. Ballistic grade aramid fibres may be utilised where this characteristic is required due to the intended use of the finished product. Organic fibres and modified organic fibres such as jute or hemp may also be used.

The fibrous layer may comprise fibres of only one kind or different types of fibre may be combined in the fibrous layer.

The fibres may be used alone or in combination. The fibres may be used in the form of tissue, chopped strand mat, continuous mat, woven fabrics, stitched fabrics, or simple rovings. Any suitable fibre size may be used. Particularly preferred are E-glass yarns having a filament diameter of 5 to 13  $\mu\text{m}$  and 11 to 136 tex or E-glass rovings having a filament diameter of 10 to 16  $\mu\text{m}$  and 600 to 2400 tex. The fibrous material may be preformed before being laid on to the resin layer or alternatively, loose fibres may simply be laid onto the resin layer.

In a particularly preferred arrangement, the fibres are arranged such that they are unidirectional. Where the moulding material of the present invention comprises two fibrous layers conjoined to opposing faces of the resin layer, the fibrous layers may be orientated in the same direction or in different directions. In particular, the fibre orientation of the skins of the sandwich material may be  $0^\circ$ ,  $90^\circ$ ,  $0^\circ/90^\circ$ ,  $\pm 45^\circ$  or quasi isotropic or  $0^\circ/\pm 45^\circ/-45^\circ$ .

The adhesive properties of the resin layer will, in a preferred aspect of the invention, be sufficient to retain the fibrous layer howsoever formed in position. In one alternative arrangement the fibres may be partially compacted into the resin layer to improve adhesion. In another alternative arrangement, the fibrous layer may be retained against the resin layer by means of an adhesive. It will be understood that the adhesive will not prevent the travel of the resin into the fibrous layer during production of the product.

In one alternative arrangement, a tackifier and/or a binder material may be applied to one or both surfaces of the multi-layered moulding material. The tackifier/binder is preferably applied as a light covering. Typically, the tackifier/binder may be applied in an amount of 0.5% to 7% of the fibre weight.

The presence of the tackifier/binder serves a number of functions. First, it may provide a degree of tack to the surfaces of the material therefore assisting adjacent layers of material to be held together during processing.

Secondly, the presence of the tackifier/binder serves to stabilise the fibrous layers and thereby improves the integrity of the surface of the prepreg. This is particularly important where the fibrous layers on the faces of the improved prepreg are made from pure rovings or tows of fibres rather than of woven or stitched materials. The material of this embodiment may have improved handling characteristics and may be less likely to be damaged by handling prior to moulding.

Where a tackifier/binder is present, it may also serve as an interply toughening agent which can give significant improvements in interply fracture energy.

Any suitable material may be used as a binder/tackifier. Particularly suitable materials include high molecular weight resins. These resins may be used alone or in combination with additives including toughening agents and curing agents.

The tackifier/binder may be applied to the material by any suitable means including, spraying using a carrier solvent, hot melt techniques or dry powder applications. In a

particularly preferred arrangement, the tackifier/binder forms discrete particles on the surface of the fibres rather than a uniform coating. The tackifier/binder may be applied to the material at any suitable time during its manufacture.

- 5 The arrangement of the structure of the fibres in the fibrous layer or of the fibrous layer itself may be altered depending on the properties required to be exhibited in the finished end product. For example, where the product is to be a high performance composite mould tool, it is preferable to use discrete areas of reinforcement rather than continuous lengths. Conventionally, these small areas are of the approximate  
10 size 300mm x 300mm. Although the use of fibrous materials having discrete areas of reinforcement offer a range of benefits, they have not generally been accepted by some fabricators in the past as their use is labour intensive. This is particularly the case where the moulding is large in size and comprises several layers. In this connection, it is noted that in the fabrication of, for example, composite tools, the  
15 moulding may be made of about 20 layers and be 20 to 50 m<sup>2</sup> in area.

It will be understood that a moulding material in accordance with the present invention may be readily formed by laying pieces of fibrous material, of the desired size onto the resin layer. Thus according to a further preferred aspect of the present  
20 invention there is provided a moulding material in which the or each fibrous layer comprises discrete pieces of fibrous material. Thus the fibrous layer may be discontinuous.

The benefit associated with materials formed in this way is that the fabricator can  
25 simply roll out the material and the need to separately attach, for example, squares of fibrous material is obviated. As with conventional materials, the materials with these discrete areas of fibres nest down to conform to the tool profile and the risk of bridging areas of the mould leading to the formation of voids is further minimised. The reduced fibre length present in a material of this type also reduces stresses which  
30 may arise in the finished laminate. These stresses result from thermal or cure shrinkage and may result in delamination or even change of shape of the tool.

The discrete panels of fibrous material used to form the fibrous layer of the moulding material of the present invention are preferably squares 300 mm x 300 mm. Where the moulding material comprises two fibrous layers located on opposing faces of the resin layer, the discrete panels are preferably arranged such that the joints between  
5 panels on the upper layer are staggered from those between panels in the lower layer. Thus the inherent strength of the material is not compromised.

The moulding materials of the present invention may be formed readily by contacting the resin layer with the or each fibrous layer.

10

Thus, according to a second aspect of the present invention there is provided a method of forming a moulding material in accordance with the above first aspect of the invention in which a fibrous layer is placed in contact with a resin layer. The fibrous layer may be partly compacted into the resin layer. Compaction may be achieved by  
15 means of compression rollers.

The moulding material of the present invention may be made by any suitable method. However, hot-melt techniques are particularly preferred.

20 In one method, the resin mixed with catalyst and any additives is preferably coated onto a support, such as siliconised paper substrate prior to being contacted by the fibrous layer. The resin is preferably coated onto the substrate using a conventional filmer. The coating is preferably laid onto the substrate at a raised temperature. The temperature selected will depend on the resin used, however a suitable temperature  
25 will be in the region of 60°C.

The weight of the resin coated on the support will depend on the properties required of the finished prepreg. However, the weight is generally from 20 to 1,200 g/m<sup>2</sup>.

30 The coated substrate may be passed over a chill plate at about 5°C to reduce the temperature of the resin.

Where it is desirable to form a moulding material having fibrous layers located on both sides of the resin layer several methods are available. In one method, two prepregs are formed as described above, the substrates are removed and the two prepregs are then combined with the two resinous sides being placed together such  
5 that the fibrous sides are located apart from each other such that they are on the outer faces of the resulting sandwich. When the two resin layers unify the resulting moulding material has a central resin layer conjoined on each face to a fibrous layer.

In one alternative arrangement, a moulding material comprising a resin layer and a  
10 single fibrous layer produced as described above is turned such that it lies on the dry fibrous layer, the support is removed and a fibrous layer may then be placed on the exposed resin surface.

In another method a carrier fabric or tissue is coated on both sides with a resin film  
15 and the dry fibrous layers are combined onto each face of the resin film.

In a further alternative method, a fibrous layer is laid as a support and the resin layer is then coated thereon. The second fibrous layer may then be readily laid onto the exposed surface.  
20

The process may be mechanised and may be a batch process or a continuous process.

Once the moulding material of the present invention is formed it may be rolled. An interleave material may be used. A particularly suitable interleave material is a  
25 polyethylene interleave.

The moulding material of the present invention may be readily stored until required. The shelf life will be dependant on the resin system. It is preferable that the material is stored at temperatures below zero (most preferably  $-18^{\circ}\text{C}$  to  $-4^{\circ}\text{C}$ ). At ambient  
30 temperature, the product has a shelf life in the region of 5 to 55 days, dependant on resin system and fibre weight. After the expiry of the shelf life period, the product is still usable but will have the characteristics and properties of conventional prepregs.

Moulding materials of the present invention or made in accordance with the second aspect of the present invention may be used alone, laminated with further layers of moulding material of the present invention or laminated with conventional prepreg materials. The materials may be processed by any suitable method and are preferably  
5 cured by means of a vacuum processing technique to form high quality laminates.

A further advantage of the moulding material of the present invention is that the thick section, i.e. one having thickness greater than 4mm, preferably about 10mm, may be produced in a single operation with no requirement for intermediate consolidation  
10 debulking stages.

Where a vertical mould surface is to be coated, a combination of the moulding material of the present invention is preferably used in combination with conventional prepreps as the high tack of the conventional material will help to hold the material of  
15 the present invention in place. Alternatively, a moulding material of the present invention coated with tackifier/binder may be used.

The moulding material of the present invention is particularly suitable for use in combination with prepreg tape. The combination of the moulding material of the  
20 present invention and the prepreg tape is particularly advantageous since the material of the present invention allows the tape to breathe such that void formation is reduced or even obviated. Further, the arrangement allows even poor quality tapes having dry or partially wet out fibres to be used since on curing the fibres will wet out completely such that a high quality laminate is formed.

25

In use, once the layers of the laminate have been laid into the mould, the resin is cured. It is desirable that a cure schedule is selected whereby the temperature is held at a point where the resin viscosity is low. The cure schedule selected will depend on the resin used.

30

Particularly improved results in processing the material of the present invention may be obtained where care is taken to ensure that the dry fibrous layers are in contact with a vacuum system to ensure that entrained air can be fully evacuated. One



method of achieving the contact between the dry fibrous layers and the vacuum system is to cut the moulding material of the present invention larger than is conventional and then linking it to the vacuum system via an air breathable media. Suitable media include a non-woven breather, woven breather or dry fibrous strands  
5 or tows. Suitable non-woven breathers include nylon felted material of  $150 \text{ g/m}^2$ .

Where required a coating may be applied to the moulding. The coating may comprise a conventional gel coat system. Suitable gel coat systems include epoxy with the incorporation of a variety of fillers and pigments. Polyester or vinylester gelcoats  
10 may also be used.

Whilst these gel coats, provide satisfactory results, they are labour intensive to use. We have now found that an improved coating may be obtained by the use of a modified moulding material of the present invention which is used as the layer closest  
15 to the mould. The modified moulding material comprises a layer of resin having a lightweight woven cloth on one face and a non-woven tissue on the other face. This material applied to a tool with the woven cloth facing the mould and backed up with either a conventional moulding material or a moulding material in accordance with the present invention gives a high quality surface substantially free of pinholes or  
20 surface porosity.

Thus according to a further aspect of the present invention there is provided a moulding material for use in the production of a surface layer comprising a resin layer having a fibrous layer conjoined to each surface thereof. The material conjoined to  
25 one surface is preferably a woven material and the layer conjoined to the opposing surface is preferably nonwoven. The fibrous layers are preferably produced from glass fibres. A light weight fibrous layer, typically  $20 \text{ gm/m}^2$ .

The woven surface layer generally wets out during the consolidation process. Any  
30 suitable woven cloth may be used. However, in a particularly preferred arrangement the material is selected to have a good light stability and to improve the appearance of the finished product.

The moulding materials of the present invention may be used in the production of a wide range of products. Examples include products used in the marine industry such as boat hulls, masts, spars; the aerospace industry such as fuselage parts; the motor industry such as car, van or lorry body parts; the sports industry such as surf boards, sailboards, and other sports equipment such as bicycles or hockey sticks, and those used in other industries such as composite tools, composite tubes and turbine blades such as those used in wind turbines.

Thus, according to a further aspect of the present invention there is provided an article of manufacture produced from the moulding material of the first aspect of the present invention or made in accordance with the second aspect of the present invention. There is also provided a method of forming the article of manufacture in which the moulding material is placed in contact with a mould and then allowed to cure.

The moulding material of the present invention may be used alone or laminated with one or more layers of moulding material in accordance with the present invention or conventional moulding materials.

The invention will now be described by way of example with reference to the accompanying example drawings in which:

- Figure 1 is schematic diagram of a three layered moulding material in accordance with the present invention;
- Figure 2 is schematic diagram of the apparatus used in the production of the moulding material of the present invention; and
- Figure 3 is schematic diagram of an alternative apparatus.

As illustrated in Figure 1, the moulding material of the present invention 1, comprises a central resin film 2 having fibrous layers 3 and 4 located on opposing faces thereof.

In use, this material 1 is laid on the tool surface 4. The material may be laminated with other materials of the present invention or with conventional preregs. In the arrangement illustrated in Figure 2, two layers of moulding material in accordance

with the present invention is interleaved with layers of conventional prepreg 5. This stack is preferably surrounded by a non-perforated film 6, a breather 7 and a vacuum film 8. The vacuum film 8 is sealed to the tooling by means of sealant tape and the air is evacuated during the curing process via vacuum line 10.

5

Curing is preferably effected at temperatures above ambient.

Glass rovings 11 may be utilised to assist the perimeter air bleed. These glass rovings are particularly advantageous were a zero bleed mode of processing is used. The  
10 glass rovings are put through the non-perforated film to assist in the evacuation of air from the laminate stack. To further assist the removal of air, glass rovings may be placed through the non-perforated film in the centre of the panel. These allow air to bleed from the centre of the panel and also connects the moulding materials of the present invention in the laminate together in the z-axis thereby further assisting  
15 evacuation of air.

When making sandwich laminates in one operation it is beneficial to have air bleed holes in the core. These allow the air to escape from the underlying laminate thus preventing any closing off of the material under the foam block. Saw cuts in the  
20 lower face of the core around the perimeter may also be used to eliminate any closing off effects of the core edge. The saw cuts are typically 2mm deep by 1mm wide and end 8cm long at a spacing of every 8cm.

The apparatus illustrated in Figure 3 is very similar to that of Figure 2 but is  
25 appropriate for use with a large laminate stack.

A suitable cure schedule involves holding the temperature at a point where the resin viscosity is low, for example, 10 poise to 100 poise for a period of 4 hours, and remains low for sufficient time for the resin to wet out the fibres of the fibrous layer  
30 or layers. A typical cure schedule would be to ramp from 25 to 70°C, a dwell at 70 °C for four hours, ramp to 85 °C and then held at 85°C for 10 hours. On this schedule a typical resin viscosity would drop down to 40 poise and at the end of the four hour

dwel has only risen to 100 poise. The ramp rates to 70 °C or 85 °C are not critical. However, they will normally be in the range of 0.1 to 10 °C/min.

### Example 1

5

A prepreg according to the present invention was formed by laying unidirectional E-glass woven reinforcement of 500 g/m<sup>2</sup> on opposing sides of a layer of 430 g/m<sup>2</sup> resin. This prepreg was interleaved with layers of conventional prepreg tape of 1200 E-glass with a resin content of 30% by weight. In both types of prepreg the resin used  
10 was the SP Systems SE90 available from SP Systems of Structural Polymer (Holdings) Limited of Isle of Wight. The resin is a high flow, 85 to 120°C cure, non-toughened epoxy prepreg cured by an accelerated dicyandiamide curing agent. SE90 prepreg is an epoxy prepreg.

15

The laminate stack was then covered with nylon peel ply and a microperforated release film, a layer of 150g non-woven breather material and an impervious nylon vacuum bag.

20 A vacuum of 90% was applied and the assembly heated from ambient to 70°C at 0.3°C/min. The temperature was then held at 70°C for 4 hours. The temperature was then ramped up to 120°C and then held for one hour. The laminate was then cooled to ambient temperature and the laminate was demoulded and examined.

25 On examination it was noted that the dry reinforcement layers had completely wet out and the laminate was free of entrapped air.

The void content of the laminate was determined by measuring the specific gravity of the sample by weighing it in air and water. The laminate was then put in an oven at  
30 650°C to burn off the resin. From the weight loss and the densities of the resin and the glass, the void content was calculated. Measurements showed the void content to be less than 0.25%. The final fibre volume fraction was 56%.

Whilst the moulding material of the present invention has been described as having at two or three layers, it will be understood that a multi-layer moulding material in accordance with the present invention, may be supplied to the fabricator in an arrangement which comprises more than three layers due to the combination of  
5 several layers of the moulding material of the present invention together.

**CLAIMS**

1. A multi-layered moulding material comprising a layer of resin material and conjoined to at least one surface thereof a fibrous layer.
2. A multi-layered moulding material according to Claim 1 wherein a first fibrous layer is conjoined to the upper surface of the resin layer and a second fibrous layer is conjoined to the lower surface of the resin layer.
3. A multi-layered moulding material according to Claim 2 wherein the first and second fibrous layers are formed from the same material.
4. A multi-layered moulding material according to Claim 2 wherein the first and second fibrous layers are formed from different materials.
5. A multi-layered moulding material according to any one of Claims 1 to 4 wherein the or each fibrous layer is held in place by the inherent tack of the surface of the resin layer.
6. A multi-layered moulding material according to any one of Claims 1 to 4 wherein the or each fibrous layer is partially impregnated by resin.
7. A multi-layer moulding material according to any one of Claims 1 to 6 wherein a tackifier and/or a binder is applied to one or both outer surfaces of the at least one fibrous layer.
8. A multi-layer moulding material according to any one of Claims 1 to 7 wherein the fibrous layer is continuous.
9. A multi-layered moulding material according to any one of Claims 1 to 8 wherein the fibrous layer is discontinuous.
10. A multi-layered moulding material according to any one of Claims 1 to 9 wherein the resin system is a thermosetting polymer

11. A multi-layered moulding material according to Claim 10 wherein the thermosetting polymer is selected from epoxy, polyester, vinylester, polyimide, cyanate ester, phenolic and bismaleimide systems, modifications thereof and blends thereof.
12. A multi-layered moulding material according to any one of Claims 1 to 11 wherein the or each fibrous layer is formed from glass fibres, carbon fibres, polyethylene fibres, aramid fibres, natural fibres or modified natural fibres.
13. A multi-layered moulding material according to any one of Claims 1 to 12 wherein the fibres in the fibrous layer or layers are unidirectional.
14. A multi-layered moulding material according to any one of Claims 1 to 13 wherein one or more layers of the material is a prepreg.
15. A multi-layered moulding material according to any one of Claims 1 to 14 wherein the material is a prepreg.
16. A multi-layered moulding material for use in the production of a surface layer comprising a multi-layered moulding material according to any one of Claims 1 to 15.
17. A multi-layered moulding material for use in the production of a surface layer according to Claim 16 in which a woven fibrous layer is conjoined to one surface and a nonwoven fibrous layer is conjoined to the opposing surface.
18. A method of forming a multi-layered material of any one of Claims 1 to 17 by placing the or each fibrous layer in contact with the resin layer.
19. A method according to Claim 18, additionally comprising the step of partly compacting the fibrous layer into the resin layer.
20. An article of manufacture produced from the moulding material of any one of Claims 1 to 17 or made in accordance with any one of Claims 18 to 19.
21. A method of forming the article of manufacturing of Claim 20 in which the moulding material is placed in contact with the mould and allowed to cure.

Fig.1.

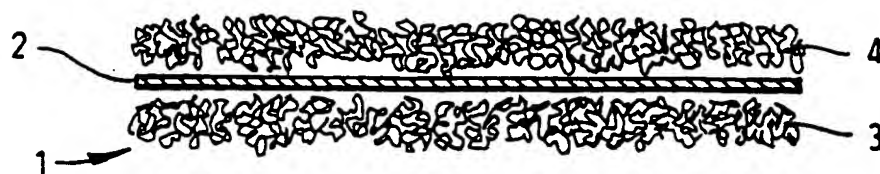


Fig.2.


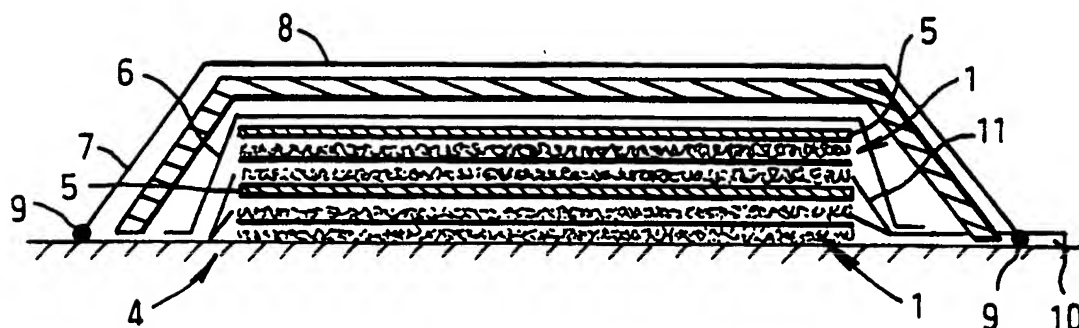


Fig.3.



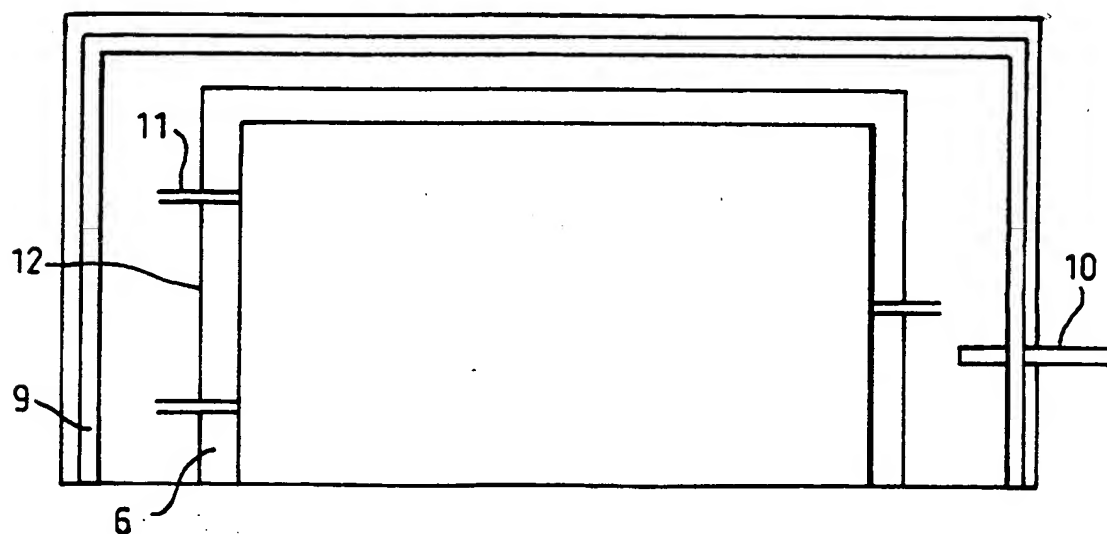

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC 7 B32B27/12 C08J5/24 B29C70/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B32B C08J B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 224 064 A (DORNIER GMBH) 3 June 1987 (1987-06-03)  the whole document	1-3, 8, 12, 18, 20, 21
X	DE 35 36 272 A (MESSERSCHMITT BOELKOW BLOHM) 16 April 1987 (1987-04-16)  the whole document	1, 5, 8, 10, 15, 18, 20, 21
X	EP 0 807 514 A (UNITED TECHNOLOGIES CORP) 19 November 1997 (1997-11-19)  the whole document	1, 6, 8, 10, 12, 15, 16, 20, 21
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.**\* Special categories of cited documents:****"A"** document defining the general state of the art which is not considered to be of particular relevance**"E"** earlier document but published on or after the international filing date**"L"** document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)**"O"** document referring to an oral disclosure, use, exhibition or other means**"P"** document published prior to the international filing date but later than the priority date claimed**"T"** later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention**"X"** document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone**"Y"** document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art**"Z"** document member of the same patent family

Date of the actual completion of the international search

8 February 2000

Date of mailing of the international search report

18/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer:

Ibarrola Torres, O

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 790 432 A (FLETCHER J ET AL) 5 February 1974 (1974-02-05)  column 3, line 21 -column 4, line 19	1-3,5,8, 10,12, 15,18, 20,21
X	DE 32 43 925 A (SIEMENS AG) 30 May 1984 (1984-05-30)  the whole document	1-3,5,8, 10,12, 18,20,21
X	GB 1 248 060 A (IMPERIAL CHEM. IND.) 29 September 1971 (1971-09-29)  the whole document	1-3,8, 12,18, 20,21
X	US 4 311 661 A (PALMER RAYMOND J) 19 January 1982 (1982-01-19)  claims; figure	1,5,8, 10-12, 18,20,21
X	US 5 431 995 A (NAKAI KIYOTAKA ET AL) 11 July 1995 (1995-07-11)  column 2, line 8 -column 5, line 62; figure 1	1-3,5,8, 10-12, 14,18, 20,21

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0224064 A	03-06-1987	DE 3542217 A	04-06-1987
DE 3536272 A	16-04-1987	NONE	
EP 0807514 A	19-11-1997	US 5786285 A	28-07-1998
		JP 10067013 A	10-03-1998
		US 5912195 A	15-06-1999
		US 5908528 A	01-06-1999
US 3790432 A	05-02-1974	NONE	
DE 3243925 A	30-05-1984	EP 0110332 A	13-06-1984
GB 1248060 A	29-09-1971	BE 743080 A	12-06-1970
		DE 1963563 A	02-07-1970
		FR 2026433 A	18-10-1970
		NL 6918875 A	22-06-1970
US 4311661 A	19-01-1982	NONE	
US 5431995 A	11-07-1995	JP 5318471 A	03-12-1993

**THIS PAGE BLANK (USPTO)**